

T.E Electrical VI CBGS


Power System Analysis QP Code : 584503 10.5.2016

(3 Hours)

[Total Marks : 80

- N.B. : (1) Question no. 1 is compulsory.
 (2) Solve any three of questions out of remaining
 (3) Assume the suitable data if required and specify the same.

1. Solve the following questions
- (a) What is the difference between symmetrical and unsymmetrical fault 5
 - (b) Discuss the importance of short circuit studies in power system 5
 - (c) What is the effect of length of cable on incident surge 5
 - (d) Discuss the term switching transient. 5
2. (a) Discuss the algorithm for short circuit studies 10
 (b) An 11 KV 100MVA alternator having sub transient reactance of 0.25 is supplying a 50 MVA motor having sub transient reactance of 0.2 pu through a transmission line. The line reactance is 0.05 pu on a base of 100MVA. the motor is drawing a 100MW at 0.8 PF leading with terminal voltage of 10.95 KV when a three phase fault occurs at generator terminals. Calculate total current in generator and motor under fault. 10
- 3 (a) Derive the equation for fault current for LG fault 10
 (b) For a figure shown below draw the zero sequence network. The data for the system 10
 is Generator G1- 50 MVA, 11KV, $X_0 = 0.08pu$
 Transformer T1 50 MVA 11/220 KV, $X_0 = 0.1pu$
 Generator G2- 30 MVA, 11KV, $X_0 = 0.07pu$
 Transformer T2 30 MVA 11/220 KV, $X_0 = 0.09pu$

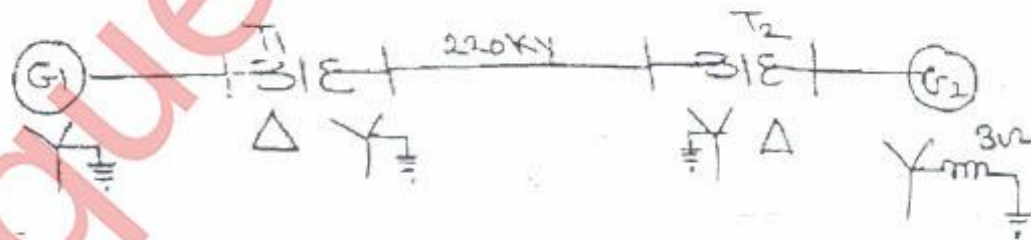

T.E. Electrical VI CGS
Power System Analysis

10.5.2016
QP Code : 584503

2

- 4 (a) Discuss the phenomenon of transient due to removal of short circuit 10
- (b) A voltage having a crest value of 3000 KV is traveling on the line of 750 KV. The surge impedance of line is 300 ohm. 10
Calculate
 - (1) current line current before reaching the arrestor
 - (2) current through arrestor
 - (3) value of arrestor resistance for this condition
 - (4) reflected voltage.
 - (5) Verify thereflection and refraction coefficient.

- 5. (a) Discuss the application of surge reactor, surge capacitor and surge arrestor 10
- (b) Expalin the various factors affecting the corona 10

- 6 (a) Discuss the phenomenon lightning 10
- (b) Explain the terms with reference to transmission line- Surge impedance loading, electrical length of a line 10

muquestionpapers.com